




## GLOBAL SYN-TURF


GLOBAL SYN-TURF  
5960 Inglewood Dr. #150  
Pleasanton, CA 94588  
TOLL FREE: 1-877-796-8873  
FAX: (510) 732-6188  
www.globalsynturf.com




SOD STAPLE 6" x 1" x 6"  
DRAINAGE PASS THROUGH FOR  
WATER IN PUNCHED HOLES  
THROUGHOUT BACKING

SEAMING TAPE  
SPECIFICATIONS

YARN TYPE POLYPROPYLENE CURLED  
BLADE  
PILE HEIGHT 5/8"  
TURF GAUGE 3/16"  
FACE WEIGHT 44 OZ YD<sup>2</sup>  
BACKING WEIGHT 13 OZ YD<sup>2</sup>  
TOTAL WEIGHT 57 OZ YD<sup>2</sup>  
STITCH RATE 34/10 CM  
STITCHES/M<sup>2</sup> 21420  
COLOR BICOLOR  
ROLL SIZE (FEET) GREEN 15' x 100'  
MAXIMUM DRAIN RATE >30 INCHES PER HOUR

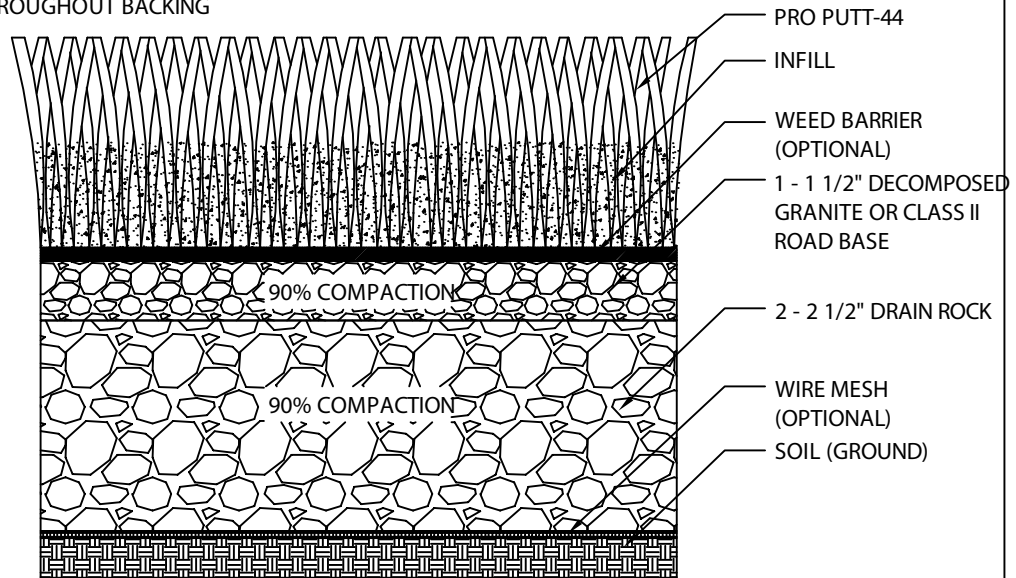

### SECTION




SECURING TURF TO BASE  
BRIGHT COMMON 40D/60D  
NAILS OR GALVANIZED NAILS  
6' APART ALONG PERIMETER.

PUSH BROOM AFTER  
INSTALLATION IS COMPLETE.

### NOTES:

1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR GST RECOMMENDED SEAMING TECHNIQUES.
2. COLOR: BICOLOR GREEN.
3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
4. DO NOT SCALE DRAWING.
5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



PUTTING GREENS

PRO PUTT-44