



GLOBAL SYN-TURF
GREENING PLANET EARTH

Product Specification Sheet



Pro Putt-44

USES


- ▶ Putting Green
- ▶ Driving Ranges
- ▶ Bocce Ball
- ▶ Tennis Court
- ▶ Landscape
- ▶ Medium-Heavy Traffic



15 Year Manufacturer's Warranty
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

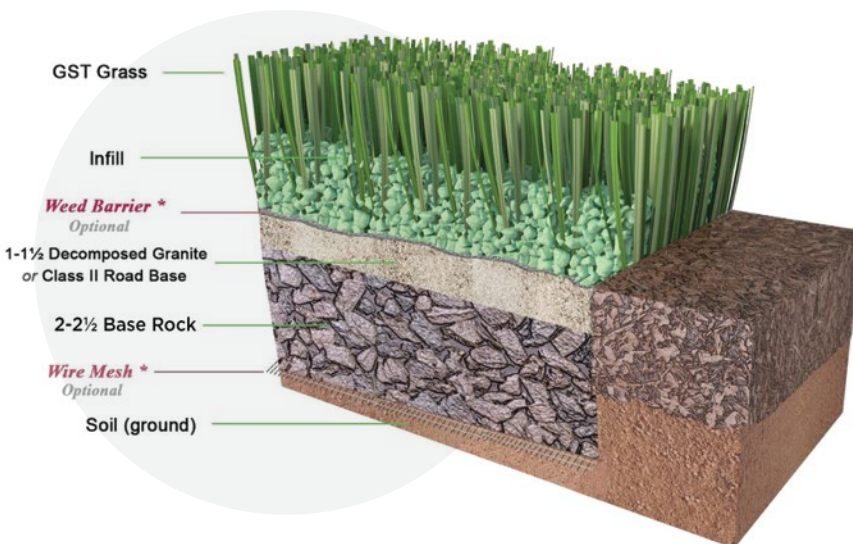

SPECIFICATIONS

Pile Height: **5/8"**

Turf Gauge: **3/16**

Face Weight: **44 oz./yd²**

Backing Weight: **23 oz./yd²**

Total Weight: **67 oz./yd²**

Stitch Rate: **31/10cm**

Stitches/M²: **65100**

Material/Dtex: **PP5800**

Color: **Medium Bi-Color Green**

Type Of Fiber: **Polypropylene Monofilament**

Infill Amount: **1.0 lb./psf.**

Primary Backing: **Premium GST Backing**

Tuft Bind: **8+ lb/force (ASTM D1335)**

Permeability: **71.0 inches/hr. (ASTM F1551)**

Melting Point: **176 °F (ASTM D2859)**

Grab Tear MD: **>300 lb./force (ASTM D5034)**

Grab Tear CMD: **>200 lb./force (ASTM D5034)**

Roll Width: **15 ft**

Roll Length: **100 ft**

Sq. Ft. Per Roll: **1500**

Total Roll Weight: **686 lbs**

