

# GLOBAL SYN-T

### **Product Specification Sheet**

## S Blade-90 Green on Green



#### R USES


- Landscape
- Lawns
- **Playgrounds**
- **Traffic Medians**
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

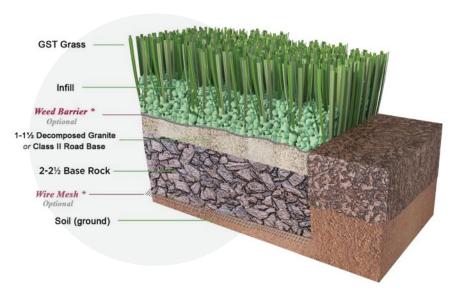

#### S-SHAPE BLADE

## **SPECIFICATIONS**

Pile Height: 1-3/4"

Turf Gauge: 3/8"

Face Weight: 90 oz./yd<sup>2</sup>

Backing Weight: 29 oz./yd<sup>2</sup>

Total Weight: 119 oz./yd<sup>2</sup>

Stitch Rate: 20.5/10cm

Stitches/M2: 23100

Material/Dtex: PE10000 + PP4400

Color: Emerald Green and Olive Green with

**Green Thatching** 

Type Of Fiber: PE monofilament and PP Curled

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 13+ lb/force (ASTM D1335)

Blade Type: S-Shape Blade

Permeability: 162.4 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 75 ft

Sq. Ft. Per Roll: 1125

Total Roll Weight: 940 lbs





