

# GLOBAL SYN-T

### **Product Specification Sheet**

## **Star Grass-35**





#### R USES


- Landscape
- Lawns
- **Playgrounds**
- **Traffic Medians**
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

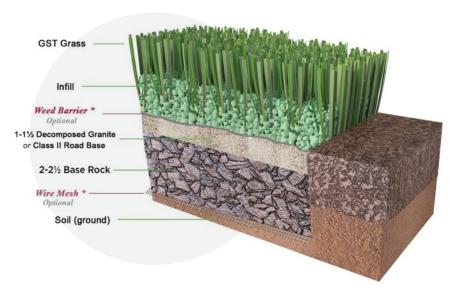

#### DIAMOND BLADE

## **SPECIFICATIONS**

Pile Height: 3/4"

Turf Gauge: 3/8"

Face Weight: 35 oz./yd<sup>2</sup>

Backing Weight: 24 oz./yd2

Total Weight: **59 oz./yd**<sup>2</sup>

Stitch Rate: 15/10cm

Stitches/M2: 15750

Material/Dtex: PE9000 + PP4000

Color: Emerald Green and Olive Green with

**Brown and Green Thatching** 

Type Of Fiber: **PE Monofilament and PP Curled** 

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 8+ lb/force (ASTM D1335)

Blade Type: **Diamond Blade** 

Permeability: 65.6 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >130 lb./force (ASTM D5034)

Grab Tear CMD: >110 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 200 ft

Sq. Ft. Per Roll: 3000

Total Roll Weight: 1266 lbs





